


LED Filament ST14(1W/2W/4W)

Description:

Efficacy: 120lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification

Replacement:

25W Incandescent Bulbs
 40W Incandescent Bulbs

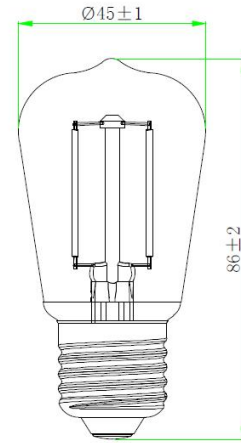


Parameters:

Material: Glass
 Input Voltage: 20VAC; 50Hz
 CCT: 2700K/4000K/6000K
 CRI: >80

View Angle: 360°
 Power Supply: Non-Isolate Drive
 Weight: 25g
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
BL.XXA02JLS00U	2700K	80	120lm	220V/50Hz	1W	0.5	E27	NO
BL.XXA02JLSD0U	2700K	80	240lm	220V/50Hz	2W	0.5	E27	NO
BL.XXB02JKS000	2700K	80	450lm	220V/50Hz	4W	0.5	E27	NO

Packing information:

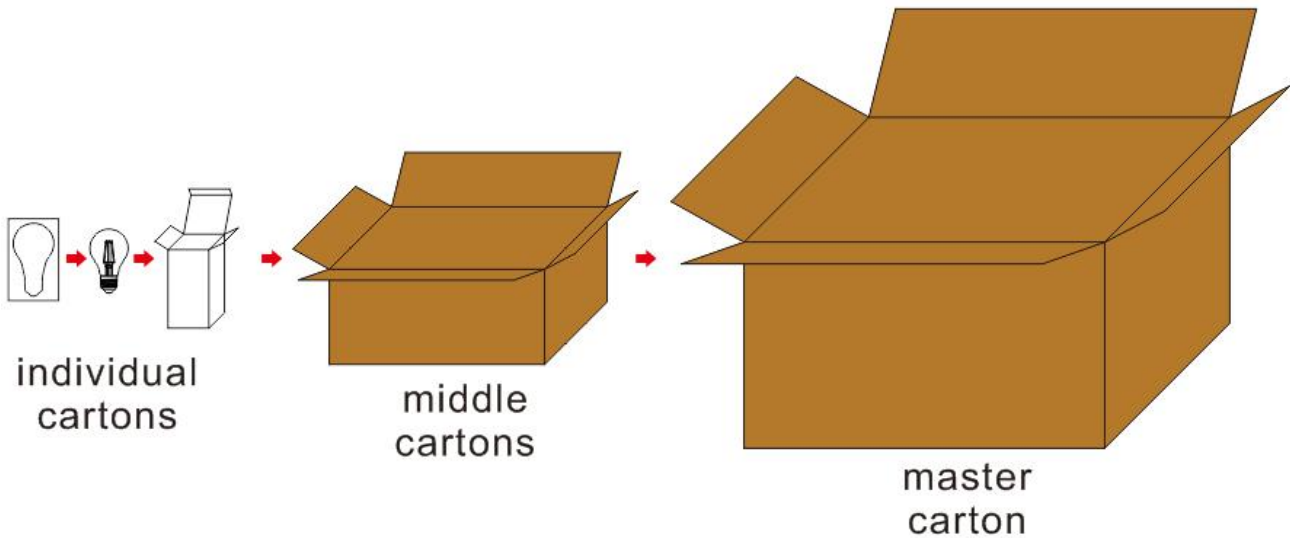

Master carton size:550*280*240mm, 550*280*290mm

Net weight:2.4kg; Gross weight:6.6kg

25 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
C22-6672-1LW
R70-6631-1LW

LUTRON:

DV-600P-WH
MACL-153MR-WH
CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
R70-6631-1LW

LUTRON:

DV-600P-WH
MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.